


CONTEGA EXO

Exterior connection tape

NEW

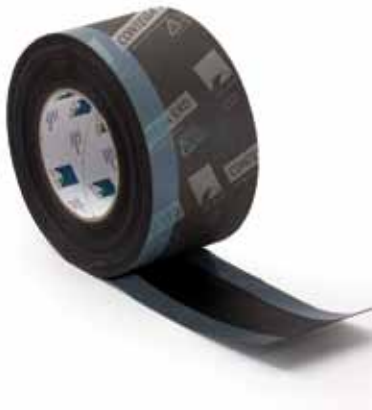

Technical data:

Characteristic	Value
Backing	Double-layer special membrane made of PP fleece and TEEE functional film
mvtr-value	0.25 MNs/g
Water column	> 2.500 mm
Temperature resistance	Long-term -40°C to +90°C
Application temperature	> -10°C
Colour	Dark grey
UV stability and outdoor exposure	3 months
Storage	Cool and dry

Applications:

For exterior wind-proof sealing of thermally insulated joints when installing windows and doors. In combination with CONTEGA FC or CONTEGA SL also suitable for sealing joints in masonry and timber construction in accordance with the high quality standard of the German RAL recommendations.

Delivery forms:

Mat. No.	EAN	Length	Width	PU	PU/Pallet
11946	4026639119469	30 m	8.5 cm	8	30
11947	4026639119476	30 m	12 cm	8	30

Surfaces:

Before bonding, the substrate surface should be brushed clean with a broom or wiped with a cloth. Bonding to frozen surfaces is not possible. The substrate material must be free from water-repellent substances (e.g. grease or silicone). The substrate onto which the tape is applied should be load bearing and stable. A permanent bond is achieved on all pro clima outdoor membranes (sarking membrane, roof lining membrane and wall lining membrane) as well as PP and PET membranes used for exterior sealing. Bonding is possible on planed and painted wood, high density plastic, hardboard (chipboard, OSB and veneer plywood and MDF board).

For bonding joints on masonry or concrete or on rough substrates, use ORCON F. The best results for the safety of the structure can be achieved on high-quality substrates. The applicator is responsible for checking the suitability of the substrate. Adhesion tests are recommended.

Features/advantages:

CONTEGA EXO is particularly flexible and soft. It can easily be folded to fit into corners. It can be used universally in timber frame construction and masonry. The monolithic functional diffusion open film enhances the drying of the structure.

- ✓ Vapour permeable sealing of outdoor window and door joints
- ✓ Monolithic TEEE functional membrane – active moisture transport
- ✓ RAL-compliant in combination with CONTEGA FC/SL indoors
- ✓ Can be plastered over on the fleece side
- ✓ With three adhesive tapes it is very versatile in timber and masonry construction

The information provided here is based on practical experience and the current state of knowledge. We reserve the right to make changes to the recommendations given or to make alterations due to technical developments and associated improvements in the quality of our products. We would be happy to inform you of the current technical state of the art at the time you use our products.

Further information about application and construction is given in the pro clima planning documentation and application recommendations. If you have any questions, please call the pro clima technical hotline Ireland and UK:
Phone: +353 46 9432104
Fax: +353 46 9432435
info@ecologicalbuildingsystems.com

For Stockists contact
Ireland
T. 046 9432104
F. 046 9432435
UK
T. 05600 758025
F. 05600 758026

Ecological Building Systems Ltd.
Main St, Athboy
Co Meath
Phone +353 469432104
Fax +353 469432435
info@ecologicalbuildingsystems.com
www.ecologicalbuildingsystems.com

