


# TESCON PROFIL

Corner sealing tape

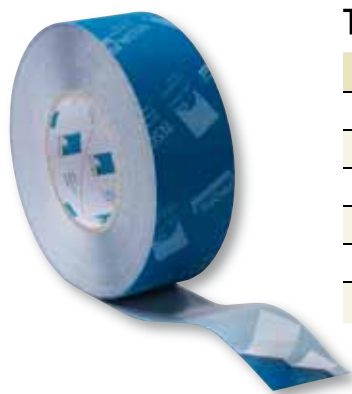

## Technical data:

Characteristic	Value
Backing	Special PP fleece
Release paper	Split silicone coated film approx. 12/23/25 mm or 12/48 mm
Temperature resistance	Long-term -40°C to +90°C
Application temperature	> -10°C
Colour	Dark blue
Storage	Cool and dry

## Applications:

Corner sealing of airtightness or windtightness layers, e.g. on windows and doors, as well as other corner joints on structures, indoors or outdoors, including joints between roof and wall installations on sarking membrane, roof lining membrane or wall lining membrane. The bonds meet the requirements of DIN 4108-7, SIA 180 and ÖNorm B8110-2 as well as bonding to wood-based panels.

## Delivery forms:

Mat. No.	EAN	Length	Width	PU	PU/Pallet
10121	4026639016263	30 m	6 cm	5	96
10807	4026639016645	30 m	6 cm	20 <b>Big Pack*</b>	24

\* Big Pack only available by the box!

## Surfaces:

Before bonding, the substrate surface should be brushed clean with a broom or wiped with a cloth. Bonding to frozen surfaces is not possible. The substrate material must be free from water-repellent substances (e.g. grease or silicone). The substrate onto which the tape is applied should be load bearing and stable. A permanent bond is achieved on all pro clima indoor and outdoor membranes (airtightness or windtightness layers membrane as well as trickle protection membrane and roof or wall lining membrane) and PE, PA, PP, aluminium foil used to create an airtight seal. Bonding and joints are possible with planed and painted wood, high density plastic and metal (e.g. pipes, windows etc.), hardboard (chipboard, OSB and veneer plywood, MDF board and softwood fibre sub-roof panels). Softwood fibre sub-roof panels require pre-treatment with TESCO PRIMER RP. The best results for the safety of the structure can be achieved on high-quality substrates. The applicator is responsible for checking the suitability of the substrate. Adhesion tests are recommended.

## Features/advantages:

- ✓ Three or two individually removable strips of release paper
- ✓ With a soft fleece backing
- ✓ Weather resistant for up to 3 months
- ✓ Very heat resistant
- ✓ Waterproof adhesive

The information provided here is based on practical experience and the current state of knowledge. We reserve the right to make changes to the recommendations given or to make alterations due to technical developments and associated improvements in the quality of our products. We would be happy to inform you of the current technical state of the art at the time you use our products.

Further information about application and construction is given in the pro clima planning documentation and application recommendations. If you have any questions, please call the pro clima technical hotline Ireland and UK:  
Phone: +353 46 9432104  
Fax: +353 46 9432435  
info@ecologicalbuildingsystems.com

For Stockists contact  
Ireland  
T. 046 9432104  
F. 046 9432435  
UK  
T. 05600 758025  
F. 05600 758026

Ecological Building Systems Ltd.  
Main St, Athboy  
Co Meath  
Phone +353 469432104  
Fax +353 469432435  
info@ecologicalbuildingsystems.com  
www.ecologicalbuildingsystems.com

