



Environmental Product Declaration

In accordance with ISO 14025:2006, EN 15804:2012+A2:2019/AC:2021 for



SOLITEX FRONTA WA SOLITEX FRONTA WA (connect) SOLITEX FRONTA HUMIDA

Breather membrane (WRB)

from

pro clima – MOLL bauökologische Produkte GmbH



| | |
|--------------------------|---|
| Programme: | The International EPD® System, www.environdec.com |
| Programme operator: | EPD International AB Box 21060 SE-10031 Stockholm, Sweden |
| EPD registration number: | EPD-IES-0018803 |
| Publication date: | 31/03/2025 |
| Valid until: | 31/03/2030 |
| EPD type: | EPD of multiple products, based on representative results (SOLITEX FRONTA HUMIDA) |

An EPD should provide current information and may be updated if conditions change. The stated validity is therefore subject to the continued registration and publication at www.environdec.com

General information

Programme information

Programme: The International EPD® System

Address: EPD International AB
Box 210 60
SE-100 31 Stockholm, Sweden

Website: www.environdec.com

E-mail: info@environdec.com

Product Category Rules (PCR)

CEN standard EN 15804 serves as the Core Product Category Rules (PCR)

Product category rules (PCR): PCR 2019:14 Construction Products, version 1.3.4.

UN CPC code: No. 36330: Plates, sheets, film, foil and strip, of plastics, not self-adhesive, non-cellular and not reinforced, laminated, supported or similarly combined with other materials

PCR review was conducted by: The Technical Committee of the International EPD® System. See www.environdec.com for a list of members. Review chair: Claudia A. Peña, University of Concepción, Chile. The review panel may be contacted via the Secretariat www.environdec.com/contact

Life Cycle Assessment (LCA)

LCA accountability: Jannik Schulz, María Díaz Cáceres

brands Et values GmbH, info@brandsandvalues.com

Third-party verification

Independent third-party verification of the declaration and data, according to ISO 14025:2006, via:

☒ EPD verification by individual verifier

Third party verifier: Jan Weinzettel, weinzettel@seznam.cz

Approved by: The International EPD® System

Procedure for follow-up of data during EPD validity involves third-party verifier:

☐ Yes ☒ No

The EPD owner has the sole ownership, liability, and responsibility for the EPD.

EPDs within the same product category but registered in different EPD programmes, or not compliant with EN 15804, may not be comparable. For two EPDs to be comparable, they must be based on the same PCR (including the same version number) or be based on fully-aligned PCRs or versions of PCRs; cover products with identical functions, technical performances and use (e.g. identical declared/functional units); have equivalent system boundaries and descriptions of data; apply equivalent data quality requirements, methods of data collection, and allocation methods; apply identical cut-off rules and impact assessment methods (including the same version of characterisation factors); have equivalent content declarations; and be valid at the time of comparison. For further information about comparability, see EN 15804 and ISO 14025.

Company information

Owner of the EPD

pro clima / MOLL bauökologische Produkte GmbH
Rheintalstr. 35-43 – 68723 Schwetzingen – Germany
T: +49 (0) 62 02 – 27 82.0; info@proclima.com

Contact

Michael Förster: support@proclima.com

Description of the organisation

pro clima is a pioneer in the intelligent, reliable sealing of building envelopes. The company develops and markets product systems for achieving maximum protection against moisture damage to structures and mould:

- Humidity-variable hydrosafe® high-performance vapour check and airtightness membranes for interior sealing on new buildings and renovation projects.
- Roofing underlays and breather membranes (WRBs) with active moisture transport for permanently protected exterior sealing of roofs and walls.
- Special adhesives and waterproof tapes.
- Sealing grommets as detailed solutions.

Highest quality for optimal performance

- The system products are manufactured using state-of-the-art production processes at leading production facilities in Germany.
- Production is subject to the highest quality standards, ensuring that insulation is reliably protected against moisture damage and mould.
- Highest effectiveness of thermal insulation.
- Reduction of heating costs due to optimal air sealing.
- Dry insulation materials.
- Best possible protection against moisture damage to structures and mould.
- Comfortable interiors in summer and winter.
- Healthy indoor climates.
- Highest ecological value.

Together towards a successful future

People are the focus of every decision at pro clima, and the company's guiding mission is to advance building culture as a whole. To achieve this goal, system products have been developed for over 30 years that are consistently geared to meet the health and comfort needs of users. Many of pro clima's pioneering developments are now established as state-of-the-art approaches. Today, these products are successfully used in over 40 countries worldwide.

Name and location of production site(s)

pro clima / MOLL bauökologische Produkte GmbH – Rheintalstr. 35-43 – 68723 Schwetzingen – Germany.

Product-related or management system-related certifications

All production sites are ISO 9001 certified.

Product information

Product name

SOLITEX FRONTA HUMIDA

Product identification

Breather membrane (WRB) for use behind ventilated pre-wall shells

Product description

SOLITEX FRONTA HUMIDA have the following components:

Protective and covering fleece: Polypropylene microfibre; Functional film: Monolithic polymer mixture.

UN CPC code

No. 36330: Plates, sheets, film, foil and strip, of plastics, not self-adhesive, non-cellular and not reinforced, laminated, supported or similarly combined with other materials

Products covered by the EPD

SOLITEX FRONTA HUMIDA (width: 1.5 m / length: 50 m) GTIN 4026639140067

SOLITEX FRONTA HUMIDA (width: 3 m / length: 50 m) GTIN 4026639140692

SOLITEX FRONTA WA (width: 1.5 m / length: 50 m) GTIN 4026639010612

SOLITEX FRONTA WA (width: 3 m / length: 50 m) GTIN 4026639010605

SOLITEX FRONTA WA connect (width: 1.5 m / length: 50 m) GTIN 4026639163189

This EPD corresponds to the representative product – SOLITEX FRONTA HUMIDA – and covers multiple GTINs and product variants. While all variants are similar products, they differ only in their dimensions or customised printing, such as customer logos, and in the inclusion of self-adhesive strips (SOLITEX FRONTA WA connect) or the absence of these strips (SOLITEX FRONTA WA or SOLITEX FRONTA HUMIDA). These variations meet specific customer requirements, but do not alter the inherent environmental characteristics of the product, thus justifying a common EPD.

Geographical Scope

Global

Applications

For use as a slightly diffusion-inhibiting breather membrane (weather-resistive barrier, WRB) on mineral-fibre and wood-fibre insulating panels behind a ventilated masonry/brick exterior wall.

Properties

In accordance with DIN 68800-2: for timber wall structures behind ventilated pre-wall shells. Protects wall structures against moisture from the ventilation layer. Protects the building component during the construction phase: very resistant to driving rain. 3 months of outdoor exposure.

Technical specifications

| Property | Regulation | Value |
|---------------------------------------|---------------------------|---|
| Colour | N/A | Anthracite |
| Surface weight | EN 1849-2 | 115 ±5 g/m ² ; 0.38 ±0.02 oz/ft ² |
| Thickness | EN 1849-2 | 0.40 mm ; 16 mils |
| Water vapour resistance factor μ | EN 1931 | 1 250 |
| s_d value | EN 1931 | 0.50 m |
| g value | N/A | 2.5 MNs/g |
| Vapour permeance | ASTM E 96 | 6.6 perms |
| Fire class | EN 13501-1 | E |
| Outdoor exposure | N/A | 3 months |
| Water column | EN ISO 811 | 10 000 mm ; 32' 10" |
| Watertightness, non-aged/aged* | EN 13859-2 | W1 / W1 |
| Tensile strength MD/CD | EN 13859-2 (A) | 220 N/5 cm / 150 N/5 cm ; 25 lb/in / 17 lb/in |
| Tensile strength MD/CD, aged* | EN 13859-2 (A) | 240 N/5 cm / 155 N/5 cm ; 27 lb/in / 18 lb/in |
| Elongation MD/CD | EN 13859-2 (A) | 85% / 85% |
| Elongation MD/CD, aged* | EN 13859-2 (A) | 60% / 60% |
| Nail tear resistance MD/CD | EN 13859-2 (B) | 125 N / 150 N ; 28 lbf / 34 lbf |
| *) Durability after artificial ageing | EN 1297 / EN 1296 | Passed |
| Flexibility at low temperature | EN 1109 | -40 °C ; -40 °F |
| Temperature resistance | EN 1109, EN 1296, EN 1297 | Permanent -40 °C to 100 °C ; -40 °F to 212 °F |
| Thermal conductivity | N/A | 0.04 W/(m·K) ; 0.3 BTU·in/(h·ft ² ·°F) |
| CE labelling | EN 13859-2 | Yes |

LCA information

Declared unit: 1 m² of SOLITEX FRONTA HUMIDA external windtightness membrane and accompanying packaging.

Conversion factor to mass: 0.143 kg/m²

Reference service life: 30 years

Time representativeness: Based on yearly manufacturing data from 01/01/2023 until 31/12/2023.

Description of the manufacturing processes

The SOLITEX FRONTA HUMIDA breather membrane (or weather-resistive barrier, WRB) for use behind ventilated pre-wall shells is produced by bonding and laminating two fleece layers (front and back) with a functional film layer between them to create large rolls. These rolls are printed and then cut into smaller rolls, which are the sales units. These rolls are then packaged and sent for storage and distribution, first to the central warehouse in Germany, and then all over the world for further sale.

Database and LCA software used


For the LCA model, the software system for holistic balancing (LCA for Experts) version 10.9 was used. Background data sets from the current version of the LCA for experts (GaBi) database service pack 2024.2 were used entirely.

Description of system boundaries

a) Cradle to gate with modules C1–C4 and module D (A1–A3 + C + D)

- As module A5 is not declared, the results of modules A1–A3 include the biogenic C of the product packaging and the balancing out of the biogenic carbon flows from module A5.
- Infrastructure and capital goods are excluded from the system boundaries.
- All processing steps and locations are balanced within the system boundaries.
- The LCI data manufacturing data was gathered for the specific declared product, and no co-product allocation was necessary.
- The allocation of waste follows the polluter-pays principle. The system boundary to the next product system is set when the waste reaches the end-of-waste state. The impacts of waste treatment from production are included in Module A3. The impacts of waste treatment during end-of-life are included in Module C, where the product reaches the end-of-waste status.
- All the LCI data used for modelling in Modules A2 and A3 corresponds to primary data collected from the manufacturing plant and contracted suppliers, including transportation distances from suppliers to production sites, transportation distances between production sites, material and energy inputs, and waste and emission outputs.

System diagram

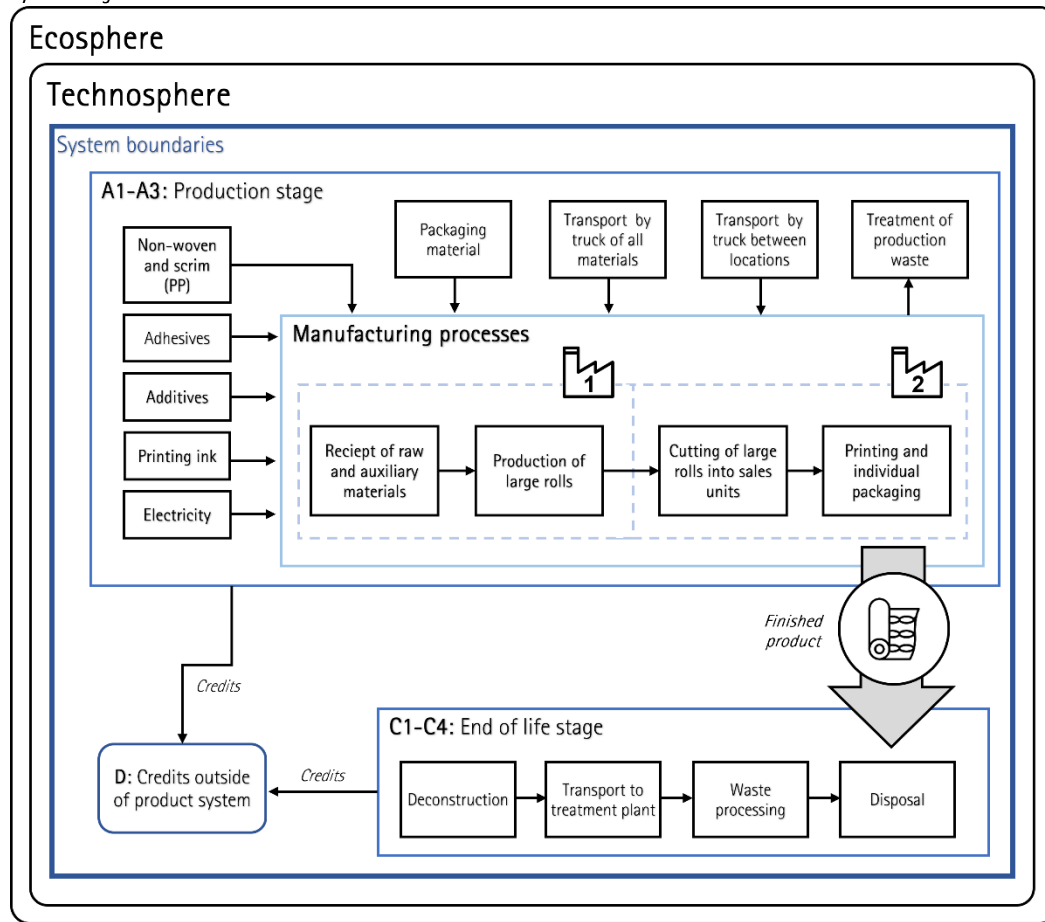

Each processing step within the system boundaries is marked with an icon and number (#1, #2, etc.), indicating the specific production site where it occurs. The system boundaries cover the following modules:

A1. Raw Material Supply

- Extraction and processing of raw materials required for manufacturing the defined external windtightness membrane: Non-woven (PP), Additives and adhesives, Printing ink.
- Extraction and processing of raw materials required for packaging the 1 m² of finished product, external windtightness membrane: Film (PE), Film (PP), Cardboard, Pallet.
- Extraction and processing of raw materials of internal packaging, used for transportation between all production locations. Internal packaging includes: Film (PE), Cardboard and Pallet.
- Generation of electricity from primary energy resources to supply the production sites with energy.

A2. Transportation

- Transportation of the raw materials was modelled based on the providers specific locations and transportation via truck to the production location #1 in Germany. All materials are procured from providers within less than 800 km.
- After production, the large rolls are transported to the production location #2.
- The transportation of raw materials for packaging, as well as the transportation of the large rolls from the production location #1 to location #2 is modelled in Module A2.

A3. Manufacturing

- Manufacturing of the defined external windtightness membrane occurs in Germany.
- The production of the large membrane roll is done in the production location #1, by bonding and laminating the polymers and the non-woven.
- In location #2, the membrane is confectioned, by adding the adhesive and release film. The membrane is cut into sale units. The products are then packed on pallets for further transportation.
- Treatment of waste generated from the manufacturing processes is included in the model. The model includes processing up to the end-of-waste status or disposal of final residues including any packaging not leaving the factory gate. Resulting credits are assigned to module D.
- Electricity for production in module A3 is modelled with the German Residual electricity mix.

C1–C4. End of Life

- The external windtightness membrane is treated as waste in module C3 by means of incineration with energy recovery.
- Module C2 contains the environmental impact of transportation of the product to the waste treatment plant.
- Module C3 contains the necessary processes for waste treatment at the end of the product life cycle. The loads for waste treatment are mapped here until the end of the waste property is reached.
- Emissions are assigned to module C3. Resulting credits are assigned to module D.

D. Reuse, recovery, recycling potential

- This product has no considerable benefits due to reuse, but considerable benefits from material and energy recovery.
- The value flows resulting from the treatment of production waste in module A3 and C3, which can potentially serve as material or energy input for a downstream product system in the form of the energy recovered from the waste-to-energy treatment and material recovery, are accounted for completely in module D as credits outside of product system.

More information

- Additional information can be obtained by contacting pro clima at info@proclima.com
- LCA practitioner: brands & values GmbH, info@brandsandvalues.com

Electricity use in Module A3 accounts for less than 30% of the GWP-GHG results of modules A1-A3. The energy requirements for production in Module A3 were modelled using the Residual electricity mix of the electricity supplier on the market. In this case the LCA for Experts dataset of [Residual grid mix; AC, technology mix; consumption mix, to consumer; <1kV](#) in Germany from the reference year 2022. The climate impact of the dataset is 0.847 kg CO₂ eq./kWh (using the GWP-GHG indicator). A residual mix represents the production mix of a country corrected with generation attributes which are explicitly tracked. Residual mix is used to determine the energy origin of untracked consumption, i.e. consumption, which has not been disclosed with explicit tracking instruments such as Guarantees of Origin. The Residual grid mix in question includes the following energy sources: 1.8% from renewable sources, 18.17% from nuclear, 34.57% from lignite, 21.19% from coal, 20.88% from gas, 1.08% from oil and 2.32% from non-specific fossil sources according to the LCA for Experts dataset.

Modules declared, geographical scope, share of specific data (in GWP-GHG indicator) and data variation

| | Product stage | | | Construction process stage | | Use stage | | | | | | | End of life stage | | | | Resource recovery stage |
|----------------------|---------------------|-----------|---------------|----------------------------|---------------------------|-----------|-------------|--------|-------------|---------------|------------------------|-----------------------|----------------------------|-----------|------------------|----------|-------------------------------------|
| | Raw material supply | Transport | Manufacturing | Transport | Construction installation | Use | Maintenance | Repair | Replacement | Refurbishment | Operational energy use | Operational water use | De-construction demolition | Transport | Waste processing | Disposal | Reuse-Recovery- Recycling-potential |
| Module | A1 | A2 | A3 | A4 | A5 | B1 | B2 | B3 | B4 | B5 | B6 | B7 | C1 | C2 | C3 | C4 | D |
| Modules declared | X | X | X | ND | ND | ND | ND | ND | ND | ND | ND | ND | X | X | X | X | X |
| Geography | DE | DE | DE | | | | | | | | | | GLO | GLO | GLO | GLO | GLO |
| Specific data used | 5% | | | | | | | | | | | | | | | | |
| Variation – products | -12.10%* | | | | | | | | | | | | | | | | |
| Variation – sites | 0% | | | | | | | | | | | | | | | | |

Modules declared: (X = included; ND = not declared).

*Measured in terms of GWP-fossil results. See interpretation.

Content information

| Product components | Weight, kg | Post-consumer material, weight-% | Biogenic material, weight-% and kg C/kg |
|-------------------------------------|--------------|------------------------------------|---|
| Non-woven (PP) | 0.090 | 0.0% | 0 %- 0 kg C/kg |
| Additives and adhesives | 0.024 | 0.0% | 0 %- 0 kg C/kg |
| Printing ink | 0.001 | 0.0% | 0 %- 0 kg C/kg |
| Total product | 0.115 | 0.0% | 0 %- 0 kg C/kg |
| Packaging materials | Weight, kg | Weight-% (relative to the product) | Weight biogenic carbon, [kg C/kg] |
| Film (PE) | 0.006 | 4.5% | 0 kg C/kg |
| Film (PP) | 0.000 | 0.0% | 0 kg C/kg |
| Cardboard | 0.005 | 3.7% | 0.002 kg C/kg |
| Pallet | 0.016 | 11.2% | 0.008 kg C/kg |
| Total packaging | 0.028 | 19.5% | 0.01 kg C/kg |
| TOTAL Product with packaging | 0.143 | 100% | 0.01 kg C/kg |

| Dangerous substances from the candidate list of SVHC for Authorisation | EC No. | CAS No. | Weight-% per functional or declared unit |
|--|----------------|----------------|--|
| None | Not applicable | Not applicable | Not applicable |

Environmental information

The estimated impact results are only relative statements which do not indicate the end points of the impact categories, exceeding threshold values, safety margins or risks. According to the EN 15804 standard, the characterization factors of EU-JRC must be applied. The EN 15804 reference package based on EF 3.1. was used for the LCA calculations. The characterization factors are available at the following internet address: <http://eplca.jrc.ec.europa.eu/LCDN/developerEF.xhtml>

Disclaimer: The use of the results of modules A1-A3 (A1-A5 for services) without considering the results of module C is discouraged.

Potential environmental impact – mandatory indicators according to EN 15804

| Results per functional or declared unit | | | | | | | |
|---|---|------------|----------|----------|----------|----------|-----------|
| Indicator | Unit | Tot. A1-A3 | C1 | C2 | C3 | C4 | D |
| GWP-fossil | kg CO ₂ eq. | 3.67E-01 | 0.00E+00 | 9.49E-04 | 3.34E-01 | 0.00E+00 | -1.46E-01 |
| GWP-biogenic | kg CO ₂ eq. | 1.28E-03 | 0.00E+00 | 2.94E-06 | 2.30E-05 | 0.00E+00 | -7.25E-04 |
| GWP-luluc | kg CO ₂ eq. | 2.87E-04 | 0.00E+00 | 1.56E-05 | 5.79E-06 | 0.00E+00 | -1.35E-05 |
| GWP-total | kg CO ₂ eq. | 3.69E-01 | 0.00E+00 | 9.68E-04 | 3.34E-01 | 0.00E+00 | -1.47E-01 |
| ODP | kg CFC 11 eq. | 1.66E-10 | 0.00E+00 | 1.36E-16 | 3.48E-14 | 0.00E+00 | -1.35E-12 |
| AP | mol H+ eq. | 7.10E-04 | 0.00E+00 | 1.76E-06 | 3.66E-05 | 0.00E+00 | -1.54E-04 |
| EP-freshwater | kg P eq. | 3.23E-06 | 0.00E+00 | 3.96E-09 | 8.48E-09 | 0.00E+00 | -2.52E-07 |
| EP-marine | kg N eq. | 2.32E-04 | 0.00E+00 | 7.18E-07 | 8.77E-06 | 0.00E+00 | -4.72E-05 |
| EP-terrestrial | mol N eq. | 2.49E-03 | 0.00E+00 | 8.30E-06 | 1.72E-04 | 0.00E+00 | -5.06E-04 |
| POCP | kg NMVOC eq. | 8.67E-04 | 0.00E+00 | 1.72E-06 | 2.57E-05 | 0.00E+00 | -1.33E-04 |
| ADP-minerals&metals | kg Sb eq. | 9.27E-08 | 0.00E+00 | 8.07E-11 | 3.63E-10 | 0.00E+00 | -1.29E-08 |
| ADP-fossil* | MJ | 1.04E+01 | 0.00E+00 | 1.22E-02 | 7.33E-02 | 0.00E+00 | -2.59E+00 |
| WDP | m ³ | 5.23E-02 | 0.00E+00 | 1.43E-05 | 3.10E-02 | 0.00E+00 | -1.57E-02 |
| Acronyms | GWP-fossil = Global Warming Potential fossil fuels; GWP-biogenic = Global Warming Potential biogenic; GWP-luluc = Global Warming Potential land use and land use change; ODP = Depletion potential of the stratospheric ozone layer; AP = Acidification potential, Accumulated Exceedance; EP-freshwater = Eutrophication potential, fraction of nutrients reaching freshwater end compartment; EP-marine = Eutrophication potential, fraction of nutrients reaching marine end compartment; EP-terrestrial = Eutrophication potential, Accumulated Exceedance; POCP = Formation potential of tropospheric ozone; ADP-minerals&metals = Abiotic depletion potential for non-fossil resources; ADP-fossil = Abiotic depletion for fossil resources potential; WDP = Water (user) deprivation potential, deprivation-weighted water consumption | | | | | | |

* Disclaimer: The results of this environmental impact indicator shall be used with care as the uncertainties of these results are high or as there is limited experience with the indicator.

Potential environmental impact – additional mandatory and voluntary indicators

| Results per functional or declared unit | | | | | | | |
|---|--|------------|----------|----------|----------|----------|-----------|
| Indicator | Unit | Tot. A1-A3 | C1 | C2 | C3 | C4 | D |
| GWP-GHG ¹ | kg CO ₂ eq. | 3.67E-01 | 0.00E+00 | 9.65E-04 | 3.34E-01 | 0.00E+00 | -1.46E-01 |
| PM | Disease incidence | ND | ND | ND | ND | ND | ND |
| IR | kBq U235 eq. | ND | ND | ND | ND | ND | ND |
| ETP-fw | CTUe | ND | ND | ND | ND | ND | ND |
| HTP-c | CTUh | ND | ND | ND | ND | ND | ND |
| HTP-nc | CTUh | ND | ND | ND | ND | ND | ND |
| SQP | dimensionless | ND | ND | ND | ND | ND | ND |
| Acronyms | GWP-GHG = This indicator accounts for all greenhouse gases except biogenic carbon dioxide uptake and emissions and biogenic carbon stored in the product. As such, the indicator is identical to GWP-total except that the CF for biogenic CO ₂ is set to zero; PM = Particulate matter emissions; IR = Ionizing radiation, human health; ETP-fw = Eco-toxicity - freshwater; HTP-c = Human toxicity, cancer effect; HTP-nc = Human toxicity, non-cancer effects; SQP = Land use related impacts/Soil quality | | | | | | |

¹ The indicator includes all greenhouse gases included in GWP-total but excludes biogenic carbon dioxide uptake and emissions and biogenic carbon stored in the product. This indicator is thus almost equal to the GWP indicator originally defined in EN 15804:2012+A1:2013.

Resource use indicators

| Results per functional or declared unit | | | | | | | |
|---|--|----------|----------|----------|-----------|----------|-----------|
| Indicator | Unit | A1-A3 | C1 | C2 | C3 | C4 | D |
| PERE | MJ | 8.01E-01 | 0.00E+00 | 1.05E-03 | 2.00E-02 | 0.00E+00 | -8.88E-01 |
| PERM | MJ | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 |
| PERT | MJ | 8.01E-01 | 0.00E+00 | 1.05E-03 | 2.00E-02 | 0.00E+00 | -8.88E-01 |
| PENRE | MJ | 6.12E+00 | 0.00E+00 | 1.22E-02 | 4.34E+00 | 0.00E+00 | -2.59E+00 |
| PENRM | MJ | 4.27E+00 | 0.00E+00 | 0.00E+00 | -4.27E+00 | 0.00E+00 | 0.00E+00 |
| PENRT | MJ | 1.04E+01 | 0.00E+00 | 1.22E-02 | 7.33E-02 | 0.00E+00 | -2.59E+00 |
| SM | kg | 6.11E-03 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 1.54E-04 |
| RSF | MJ | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 |
| NRSF | MJ | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 |
| FW | m ³ | 1.80E-03 | 0.00E+00 | 1.17E-06 | 7.29E-04 | 0.00E+00 | -6.66E-04 |
| Acronyms | PERE = Use of renewable primary energy excluding renewable primary energy resources used as raw materials; PERM = Use of renewable primary energy resources used as raw materials; PERT = Total use of renewable primary energy resources; PENRE = Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials; PENRM = Use of non-renewable primary energy resources used as raw materials; PENRT = Total use of non-renewable primary energy re-sources; SM = Use of secondary material; RSF = Use of renewable secondary fuels; NRSF = Use of non-renewable secondary fuels; FW = Use of net fresh water | | | | | | |

Waste indicators


| Results per functional or declared unit | | | | | | | |
|---|------|----------|----------|----------|----------|----------|-----------|
| Indicator | Unit | A1-A3 | C1 | C2 | C3 | C4 | D |
| Hazardous waste disposed | kg | 1.56E-08 | 0.00E+00 | 4.67E-13 | 4.26E-11 | 0.00E+00 | -1.81E-09 |
| Non-hazardous waste disposed | kg | 4.46E-03 | 0.00E+00 | 1.99E-06 | 1.11E-02 | 0.00E+00 | -1.37E-03 |
| Radioactive waste disposed | kg | 1.42E-04 | 0.00E+00 | 2.22E-08 | 3.07E-06 | 0.00E+00 | -1.92E-04 |

Output flow indicators

| Results per functional or declared unit | | | | | | | |
|---|------|----------|----------|----------|----------|----------|----------|
| Indicator | Unit | A1-A3 | C1 | C2 | C3 | C4 | D |
| Components for re-use | kg | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 |
| Material for recycling | kg | 1.40E-03 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 |
| Materials for energy recovery | kg | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 |
| Exported energy, electricity | MJ | 2.26E-02 | 0.00E+00 | 0.00E+00 | 6.74E-01 | 0.00E+00 | 0.00E+00 |
| Exported energy, thermal | MJ | 5.11E-02 | 0.00E+00 | 0.00E+00 | 1.20E+00 | 0.00E+00 | 0.00E+00 |

Interpretation

The following dominance analysis examines the individual impact categories and considers them in detail.

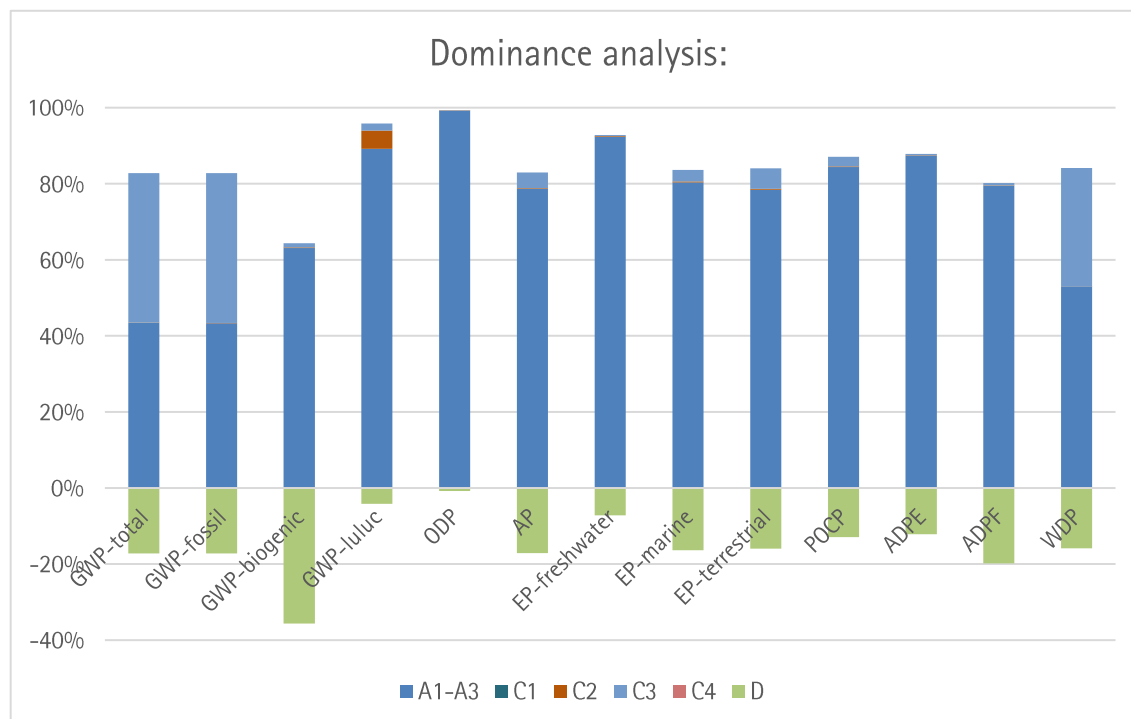

The environmental impacts were analysed using the example of global warming potential (GWP total) to identify the responsible sources along the life cycle. Modules A1-A3 (52.3%) have a dominant influence followed by Module C3 (47.6%) on GWP total and fossil.

The main source of GWP impact is the incineration of non-woven, followed by its production. The production of non-woven is the second source of environmental impact in all main categories, only surpassed in the GWP-fossil by the incineration of Polypropylene (PP).

Transportation of raw materials to and between the manufacturing sites (A2) and disposal transportation of the product in EoL (C2) are not very relevant in terms of GWP total.

The production of non-woven in Modules A1-A3 has the largest contribution to the impacts of all main indicators, except for GWP luluc and GWP fossil. The truck transport in Module A2 is the main contributor for GWP luluc and the incineration of polypropylene (non-woven) in Module C3 for GWP fossil.

The data quality of the relevant generic datasets used is classified as very good, good or satisfactory. Relevant data sets are defined as data sets that together account for at least 80% of the absolute impact of each core indicator included in the EPD across the declared modules with the exception of Module D.

The variation of the environmental impact indicator results for modules A to C between the included products is depicted in the following table:

| Highest variations between the declared product and the included products | | | |
|---|------|--------|------|
| Indicator | Unit | Min | Max |
| GWP-total | % | -12.1% | 0.0% |
| GWP-fossil | % | -12.1% | 0.0% |
| GWP-biogenic | % | -10.7% | 0.0% |
| GWP-luluc | % | -15.1% | 0.0% |
| ODP | % | -98.7% | 0.0% |
| AP | % | -13.8% | 0.0% |
| EP-freshwater | % | -79.9% | 0.0% |
| EP-marine | % | -12.8% | 0.0% |
| EP-terrestrial | % | -12.7% | 0.0% |
| POCP | % | -13.7% | 0.0% |
| ADP-minerals Et metals | % | -66.2% | 0.0% |
| ADP-fossil1 | % | -13.2% | 0.0% |
| WDP | % | -21.4% | 0.0% |

The products SOLITEX FRONTA HUMIDA, SOLITEX FRONTA WA and SOLITEX FRONTA WA connect from pro clima share several key characteristics, such as their purposes, installation methods, technical characteristics, humidity-variable diffusion resistance and underlying technology.

SOLITEX FRONTA HUMIDA, SOLITEX FRONTA WA and SOLITEX FRONTA WA connect are high-performance breather membranes from pro clima, designed for external sealing of building envelopes. They all feature a durable multi-layer structure with a polypropylene microfibre and monolithic TEEE or polymer mixture membrane. These membranes provide excellent protection against driving rain and can withstand UV exposure and weather conditions for up to three months during construction. Additionally, they are suitable for use behind closed facades, making them versatile for different substrates and cladding types. With their advanced moisture management and protective qualities, they help ensure the longevity of the building envelope.

Regarding the environmental impact of producing 1 m² of these products, SOLITEX FRONTA HUMIDA can be considered representative because of the shared material composition, manufacturing process and functional equivalence of the three variants.

Material Composition: The core material and manufacturing processes are similar across these products, with variations primarily in the composition of the TEEE or polymer mixture membrane and additional features, such as 'connect' self-adhesive strips on the long edges of the membrane.

Manufacturing Process: The production processes for these membranes are largely consistent, involving similar raw materials and energy inputs. Therefore, the environmental impact per square metre is comparable across the range.

Functional Equivalence: All products fulfil the same fundamental function of providing a weather-resistive barrier. While the functional equivalence of the products differs due to variations in the water vapour resistance factor (μ -value), their material composition and production processes are comparable.

It is worth noting that the ODP, EP-freshwater and ADPe impact categories exhibit high variability primarily because their values are in the E-06, and E-11 range. At such small magnitudes, even minor changes in input data can lead to seemingly large percentage variations, despite having minimal real-world significance. The product with the highest environmental impact – SOLITEX FRONTA HUMIDA – was selected as the representative product as a conservative approach to the EPD.

By analysing the environmental impact of SOLITEX FRONTA HUMIDA, one can reasonably apply its impacts to the other products in the series, considering their shared material composition and manufacturing processes.

References

ASTM E96, Standard test methods for water vapor transmission of materials, 2017. <https://dx.doi.org/10.1520/E0096-00E01>

DIN EN 15804. (2019). Sustainability of construction works – Environmental product declarations – Core rules for product category of construction products. Deutsches Institut für Normung DIN. Retrieved from <https://doi.org/10.31030/1736947>

EN 1109:2013-07, Flexible sheets for waterproofing – Bitumen sheets for roof waterproofing – Determination of flexibility at low temperature, 2013. <https://dx.doi.org/10.31030/2007324>

EN 1296:2001-03, Flexible sheets for waterproofing – Bitumen, plastic and rubber sheets for roof waterproofing – Method for artificial ageing by long term exposure to elevated temperature, 2001. <https://dx.doi.org/10.31030/9115025>

EN 1297:2004-12, Flexible sheets for waterproofing – Bitumen, plastic and rubber sheets for roof waterproofing – Method of artificial ageing by long term exposure to the combination of UV radiation, elevated temperature and water, 2004. <https://dx.doi.org/10.31030/9185565>

EN 13501-1:2019-05, Fire classification of construction products and building elements – Part 1: Classification using data from reaction to fire tests, 2019. <https://dx.doi.org/10.31030/2870379>

EN 13859-1:2014-07, Flexible sheets for waterproofing – Definitions and characteristics of underlays – Part 1: Underlays for discontinuous roofing, 2014. <https://dx.doi.org/10.31030/2143338>

EN 1849-2:2019-09, Flexible sheets for waterproofing – Determination of thickness and mass per unit area – Part 2: Plastics and rubber sheets for roof waterproofing, 2019. <https://dx.doi.org/10.31030/3042454>

EN 1931:2001-03, Flexible sheets for waterproofing – Bitumen, plastic and rubber sheets for roof waterproofing – Determination of water vapour transmission properties, 1001. <https://dx.doi.org/10.31030/9058392>

EN ISO 811:2018-08, Textiles – Determination of resistance to water penetration – Hydrostatic pressure test (ISO 811:2018), 2018. <https://dx.doi.org/10.31030/2807631>

EPD International. (2021). General Programme Instructions of the International EPD® System. Version 4.0.

EPD International. (2024). PCR 2019:14 Construction products and construction services. Version 1.3.4.

Sphera Solutions GmbH. (2024). LCA for Experts 10.7: Software and Database for Life Cycle Engineering and the databases (service pack 2023.2). Sphera Solutions GmbH.



pro clima / MOLL bauökologische Produkte GmbH

www.proclima.com

www.environdec.com



For over 20 years, Ecological Building Systems has been at the forefront of environmental and sustainable building products supplying a range of innovative airtightness solutions and natural insulations backed up with expert technical support.

As product suppliers in the UK and Ireland, we're happy to assist you with your projects and have expert technical and sales advice on hand.



Call us

Great Britain +44 (0)1228 711511

Ireland +353 46 9432104



Email us

info@ecologicalbuildingsystems.com



Find us

Great Britain Ecological Building Systems UK Ltd.,
Cardewlees, Carlisle, Cumbria, CA5 6LF,
United Kingdom

Ireland Ecological Building Systems Ltd.,
Main Street, Athboy. Co. Meath, C15 Y678,
Republic of Ireland